

space plus GN 2/1 Refrigerated Cabinets



The SPACE PLUS range is the new extremely reliable generation of refrigerated and storage cabinets for professional kitchens.

Made entirely in AISI 304 stainless steel at the highest possible quality standards, they feature 75 mm thick insulation produced by injecting HCFC-free polyurethane resins.

The pressed cabinet interior has rounded edges at the bottom for easy cleaning, feet and rack support structure are made from stainless steel, while the self-closing door features a key lock and slot-in magnetic seal.

The SPACE PLUS cabinets have interior lighting and a tropical-rated system with energy-efficient, low-noise compressors and are controlled by an easy-to-read digital remote thermostat that is simple to program.

Refrigeration is fan assisted and there is an auto defrost feature with a device that automatically eliminates condensation.



Back panel control board






Tropicalized system



75 mm thick insulation

TECHNICAL DATA:

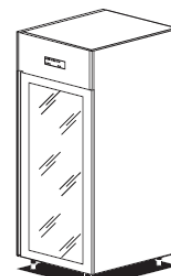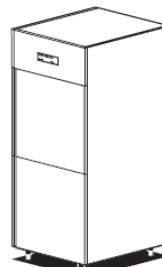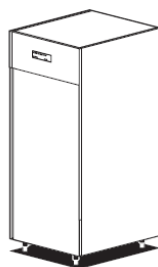


		XFN/70	XFN/71	XFNV/70
External dimensions (WxDxH)	cm	75x82x205	75x82x205	75x82x205
Capacity	lt	700	700	700
Equipment (Racks)	nr	3 GN 2/1	4 GN 2/1	3 GN 2/1
Max absorbed power *	W	350	350	350
Refrigerated power **	W	477*	477*	477*
Temperature	°C	-2/+8	-2/+8	+2/+10
Gas		R404a	R404a	R404a
Input voltage		1X230V – 50Hz	1X230V – 50Hz	1X230V – 50Hz
Climatic class		5	5	4


*Evap. -10°C cond. +45°C / **ASHRAE (Evap. -23,3°C cond. +54,4°C)

INSTALLATION DIAGRAM:

XFN/70 – XFN/71 – XFNV/70

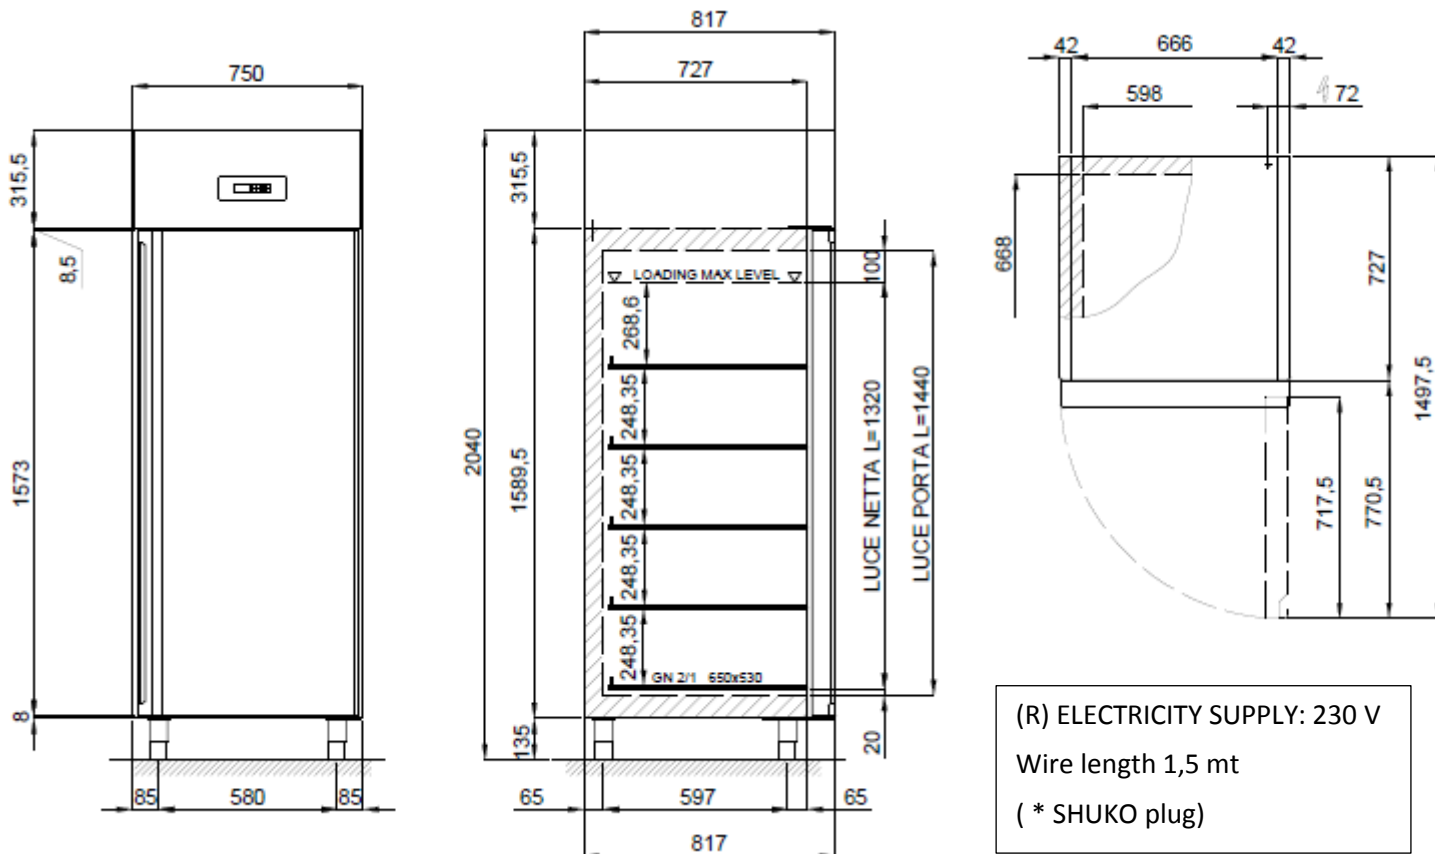

ACCESSORIES AND OVERPRICES ON REQUEST:



45000500 GN 2/1 rack



45001550 Pair of runners for GN 2/1 rack

45000530 Door pedal

45000540 Kit 4 castors Ø 100 mm

45000543 Trays structure for n. 19 trays cm 40x60, pitch mm 65, each door

45000560 Volt. 60 Hz (overprice)



Refrigeration system with R290 gas (overprice)



Arrangement for remote condensing unit